

High performance concealed bearing butt hinge

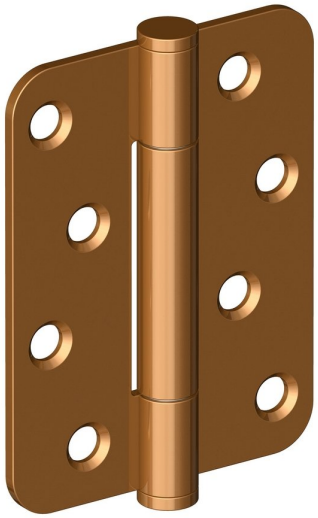

Product image



Dimensions drawing (DIM)

Reference

FH001 R 76 PCU

Material

Stainless steel 316

Finish

Trad polished copper

Size

102x76mm

Corners

Radius

Description

Suitable for doors up to 160kgs
High performance low friction / low wear concealed bearing
Tested to EN1935 grade 14
Independently tested to 1,000,000 cycles
For use on timber fire doors up to FD120
Certifire approved
UKCAmarked

Specifications Division
Unit 8 Orpington Business Park
Orpington Kent BR5 3AA

franchi.co.uk **contracts@franchi.co.uk** **+44 (0) 16 8938 7900**