



Reduced ligature hinge

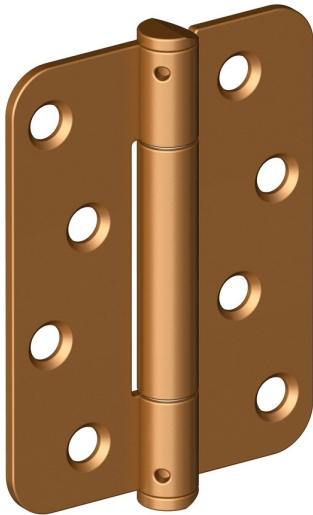

Product image

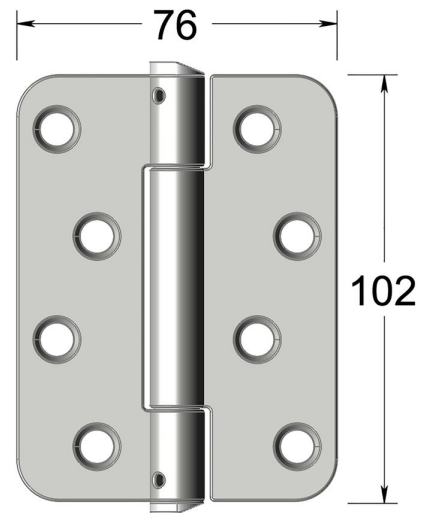

Dimensions drawing (DIM)

Reference

FH031 76 R SCU

Finish

Trad satin copper

Corners

Radius

Material

Stainless steel 316

Size

102x76mm

Description

Suitable for doors up to 160kgs
 High performance low friction / low wear concealed bearing
 Anti-ligature knuckles
 Tested to EN1935 grade 14
 For use on timber fire doors up to FD60
 Certifire approved
 UKCA marked