

Concealed bearing conductor hinge

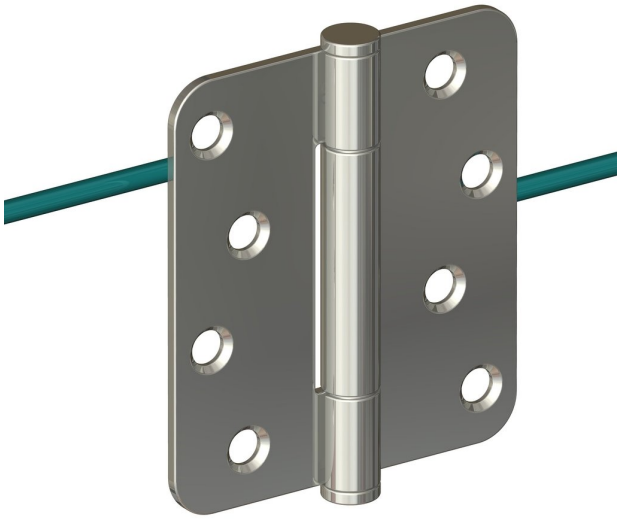

Product image

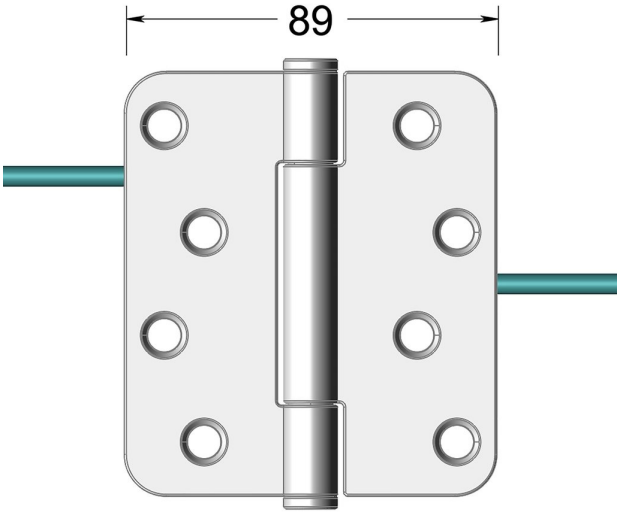

Dimensions drawing (DIM)

Reference

FH041 89 R PSS

Material

Stainless steel 316

Finish

Incasa polished stainless steel

Size

102x89mm

Corners

Radius

Description

Suitable for doors up to 160kgs
High performance low friction / low wear concealed bearing
Available with 4, 8 & 12 wire
Tested to EN1935 grade 14
For use on timber fire doors up to FD120
Certifire approved
UKCA marked

Specifications Division
Unit 8 Orpington Business Park
Orpington Kent BR5 3AA

franchi.co.uk **contracts@franchi.co.uk** **+44 (0) 16 8938 7900**