



Concealed bearing conductor hinge

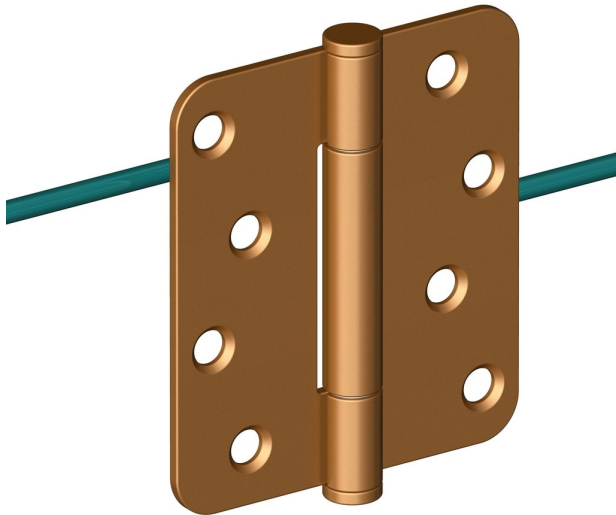

Product image

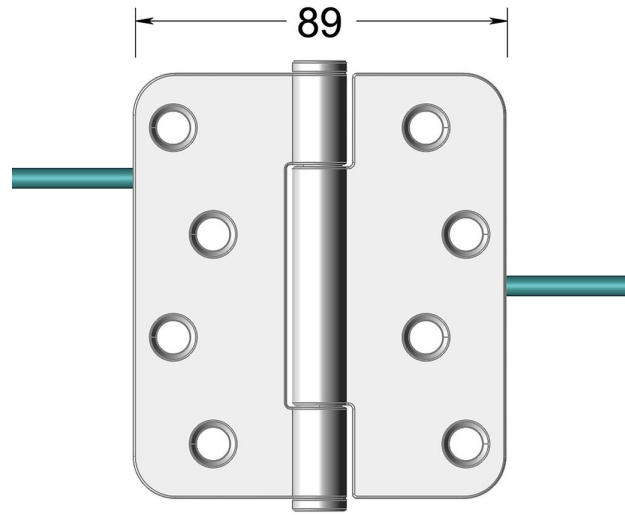

Dimensions drawing (DIM)

Reference

FH041 89 R SCU

Finish

Trad satin copper

Corners

Radius

Description

Suitable for doors up to 160kgs
 High performance low friction / low wear concealed bearing
 Available with 4, 8 & 12 wire
 Tested to EN1935 grade 14
 For use on timber fire doors up to FD120
 Certifire approved
 UKCA marked

Material

Stainless steel 316

Size

102x89mm